





F SERIES

PREMIUM
line



IMPACT
BOOSTER
TECHNOLOGY

- STATIONARY PULVERIZER
- FRANTUMATORE SECONDARIO
- BROYEUR HYDRAULIQUE
- DEMOLEDOR SECUNDARIO
- STARRE PULVERISIERER

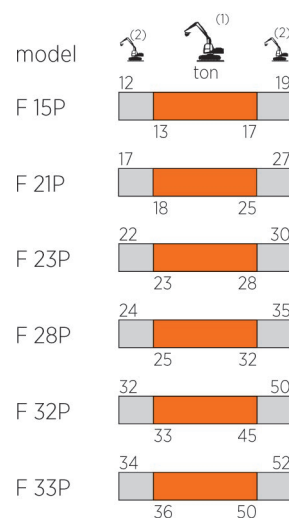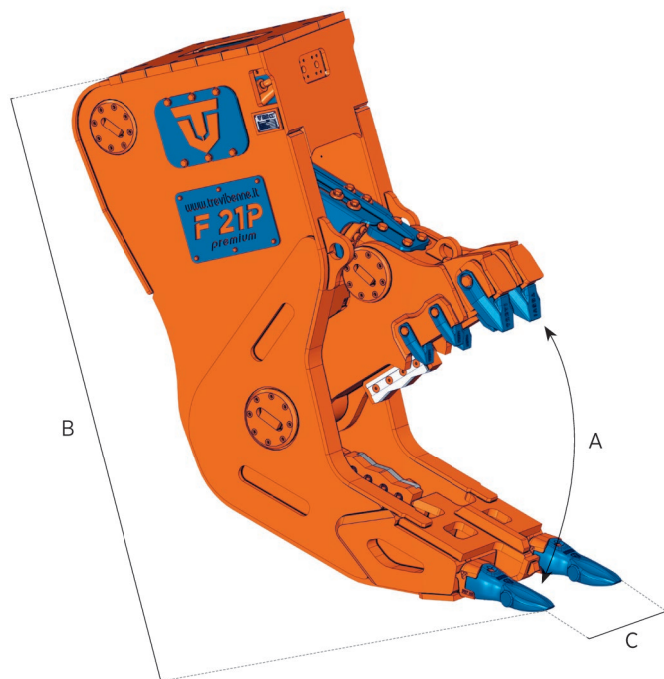

(1) Optimum excavator-equipment combination
Accoppiamento escavatore-attrezzatura ottimale
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination

(2) Possible excavator-equipment combination
Accoppiamento escavatore-attrezzatura possibile
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination



		F 15P	F 21P	F 23P*	F 28P	F32P*	F33P
	kg.	1380	2070	2520	2680	3300	3750
A	mm.	670	835	835	890	890	980
B	mm.	1820	2135	2535	2300	2710	2600
C	mm.	460	540	540	670	670	700
	mm.	220	260	260	260	260	260
	mm.	40	45	45	55	55	60
	bar	250	250	250	250	250	250
	l/min.	130 / 200	180 / 250	180 / 250	230 / 300	230 / 300	250 / 350
	bar	/	/	140	/	140	/
	l/min.	/	/	20 / 40**	/	20 / 40**	/

*Model equipped with continuous hydraulic 360° rotation / *Modello fornito con rotazione idraulica continua a 360° / *Modèle équipé de rotation hydraulique à 360° en continu
*Modelo entregado con rotación hidráulica continua a 360° / *Modell ausgestattet mit hydraulischer kontinuierlicher 360° Drehvorrichtung

**Double motor / **Doppio motore / **Double moteur / **Doble motor / **Doppelmotor



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY




F SERIES

PREMIUM
line



IMPACT
BOOSTER
TECHNOLOGY

- STATIONARY PULVERIZER WITH MAGNET
- FRANTUMATORE SECONDARIO CON MAGNETE
- BROYEUR HYDRAULIQUE AVEC AIMANT
- DEMOLEDOR SECUNDARIO CON IMÁN
- STARRE PULVERISIERER MIT MAGNET

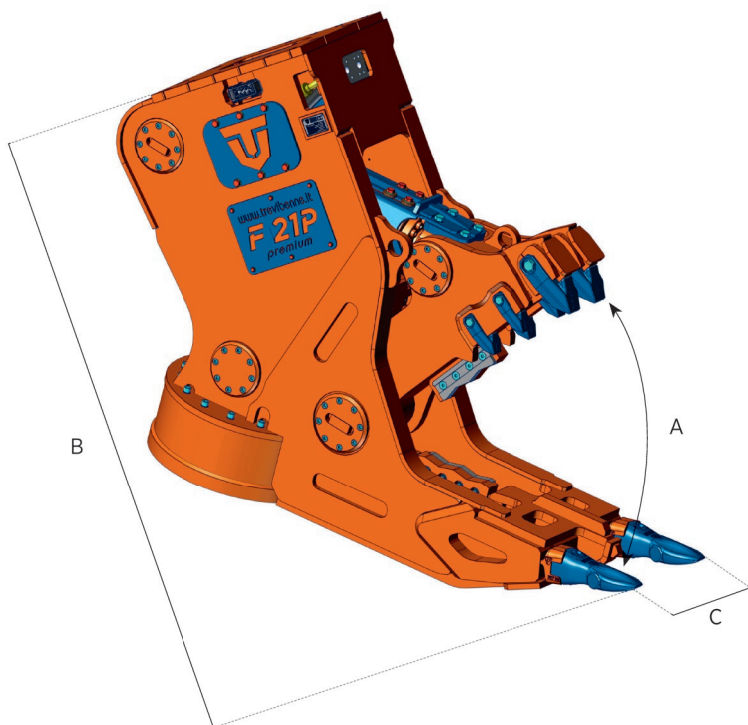

model	(2)	(1)	(2)
	21	ton	29
F 21PM	22	28	
F 28PM	28	37	
	29	35	
F 33PM	35	52	
	36	50	

(1) Optimum excavator-equipment combination
Accoppiamento escavatore-attrezzatura ottimale
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination

(2) Possible excavator-equipment combination
Accoppiamento escavatore-attrezzatura possibile
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination



		F 21PM	F 28PM	F 33PM
kg	kg.	2490	3250	4250
Ø	mm.	660	770	770
A	mm.	835	890	980
B	mm.	2135	2300	2600
C	mm.	540	670	700
	mm.	260	260	260
Ø max	mm.	45	55	60
♀	bar	250	250	250
♂	l/min.	180 / 250	230 / 300	250 / 300
♀	bar	/	/	/
♂	l/min.	/	/	/



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY