



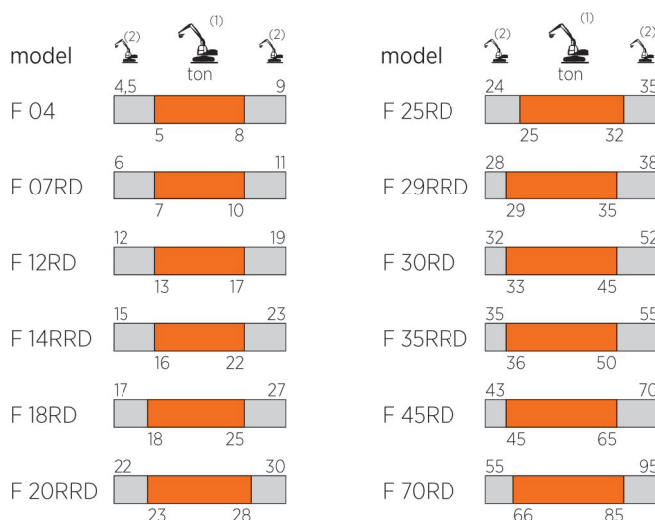

F SERIES

- STATIONARY PULVERIZER
- FRANTUMATORE SECONDARIO
- BROYEUR HYDRAULIQUE
- DEMOLEDOR SECUNDARIO
- STARRE PULVERISIERER

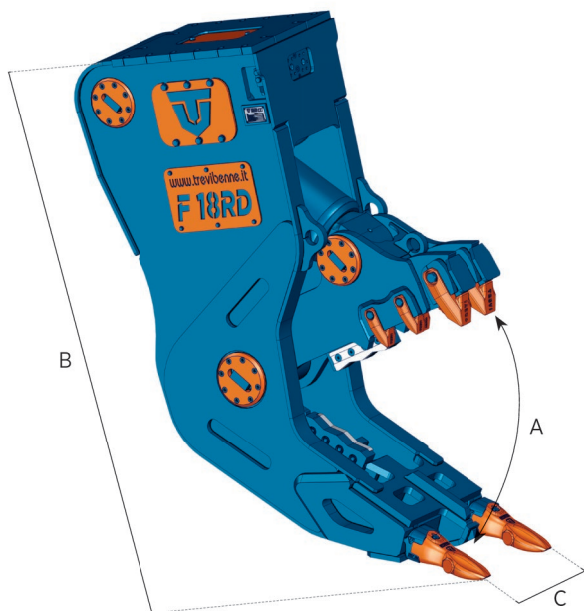

- (1) Optimum excavator-equipment combination
Accoppiamento escavatore-attrezzatura ottimale
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
- (2) Possible excavator-equipment combination
Accoppiamento escavatore-attrezzatura possibile
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination



		F 04	F 07RD	F 12RD	F 14RRD*	F 18RD	F 20RRD*	F 25RD	F 29RRD*	F 30RD	F 35RRD*	F 45RD	F 70RD
	kg.	460	680	1250	1490	1990	2410	2630	3300	3460	4150	4560	6270
A	mm.	465	530	710	710	830	830	870	870	950	950	1070	1250
B	mm.	1475	1540	1820	2160	2135	2535	2300	2710	2600	2820	2750	2950
C	mm.	305	365	460	460	540	540	670	670	700	700	760	800
	mm.	140	140	220	220	260	260	260	260	260	260	260	325
	mm.	20	25	30	30	40	40	45	45	50	50	60	75
	bar	320	320	350	350	350	350	350	350	350	350	350	350
	l/min.	80 / 150	80 / 150	120 / 200	120 / 200	200 / 300	200 / 300	250 / 350	250 / 350	300 / 400	300 / 400	350 / 450	450 / 600
	bar	/	/	/	140	/	140	/	140	/	140	/	/
	l/min.	/	/	/	12 / 25**	/	20 / 40**	/	20 / 40**	/	20 / 40**	/	/

*Model equipped with continuous hydraulic 360° rotation / *Modello fornito con rotazione idraulica continua a 360° / *Modèle équipé de rotation hydraulique à 360° en continu



**Modelo entregado con rotación hidráulica continua a 360° / **Modell ausgestattet mit hydraulischer kontinuierliche 360° Drehvorrichtung

**Double motor / **Doppio motore / **Double moteur / **Doble motor / **Doppelmotor



F SERIES

- STATIONARY PULVERIZER WITH MAGNET
- FRANTUMATORE SECONDARIO CON MAGNETE
- BROYEUR HYDRAULIQUE AVEC AIMANT
- DEMOLEDOR SECUNDARIO CON IMÁN
- STARRE PULVERISIERER MIT MAGNET

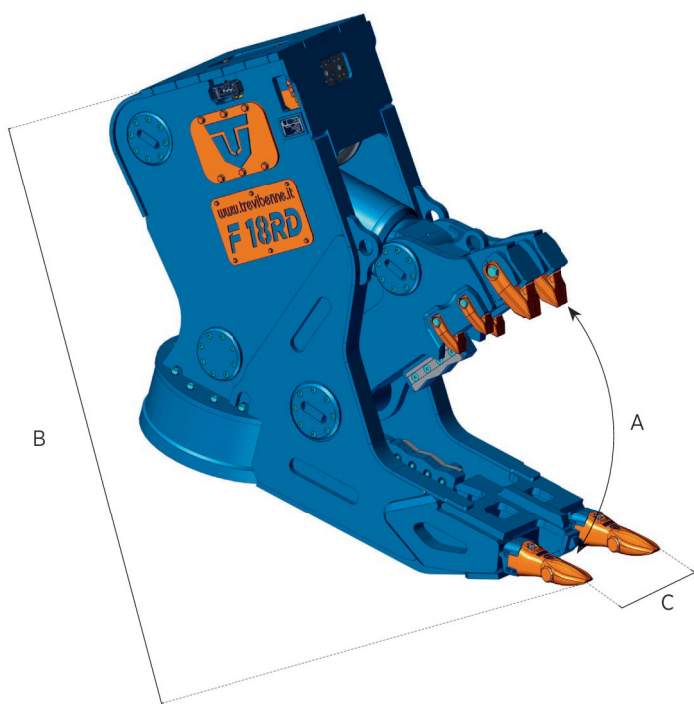

- (1) Optimum excavator-equipment combination
Accoppiamento escavatore-attrezzatura ottimale
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
- (2) Possible excavator-equipment combination
Accoppiamento escavatore-attrezzatura possibile
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination



		F 18RDM	F 25RDM	F 30RDM
kg	kg.	2400	3200	4200
Ø	mm.	660	770	770
A	mm.	830	870	950
B	mm.	2135	2300	2600
C	mm.	540	670	700
	mm.	260	260	260
Ø max	mm.	40	45	50
max	bar	350	350	350
	l/min.	200 / 300	250 / 350	300 / 400
	bar	/	/	/
	l/min.	/	/	/



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY